

## Industrial Interface The Signal Conditioning People

### TC-TC

### THERMOCOUPLE ISOLATOR

- Provides an isolated thermocouple mV signal from a non-isolated thermocouple
- High Accuracy, Low Cost
- Ultra compact DIN Rail Mount Enclosure
- Prevents earth loop & sensor failure problems in multi-thermocouple installations



#### **Description**

The TC-TC isolator accepts a mV signal from virtually any type of thermocouple and provides an identical isolated mV signal.

Typically used where non-isolated thermocouples are monitored by a multi input channel device with no channel to channel isolation, the unit can eliminate earth loop effects and prevents the failure of one sensor affecting the other sensors.

The unit is housed in a DIN-Rail mounting enclosure which is just 12.5mm wide. It has two power supply options operating either from a 12 to 36Vdc supply or 90 to 264Vac supply.

#### **Inputs**

Standard Ranges are shown below - contact Sales for others.

#### **Thermocouples**

Types E,J,K,N,R,S,T,B linearised or non-linearised Ranges: A wide range of input ranges.
Cold junction compensation (can be turned off)
Upscale or downscale t/c burnout options

Fax: 01202 480 808

#### **Outputs**


Re-transmission of input value in mV Selectable linearisation options



# Industrial Interface The Signal Conditioning People

#### **Performance Characteristics**

Parameter	Min	Тур	Max	Comments	
Supply Voltage	12	24V	36Vdc/32Vac	90 to 264 for ac input version	
Supply Current (mA)		45	85	For 24 V dc supply (260mA for 50mS	
				on start up)	
Input Impedance (Volt)		>10MΩ		Dependent on range (Typ=10V)	
Output Linearity Error		±0.01%	±0.05%		
Temp Coefficient			±50ppm/≡C		
Load Resistance Error			-	Not applicable	
Time Constant (10-90%)	25mS (fast)	60ms		Selectable fast/normal response	
		(normal)			
Operating Ambient	0≡C		55≡C		
Relative Humidity	0%		90%		
Isolation Voltage see note 1	1kV				
Surge Voltage	2.5kV for 50μS			Transient of 10kV/µS	
Notes	Absolute maximum ratings indicate sustained limits beyond which damage to the				
	device may o	device may occur.			
	Accuracy figures based on 24Vdc supply,				
	Device is protected against reverse polarity connection.				
	ISOCON doe	ISOCON does NOT provide safety isolation when the input is connected to the mains.			

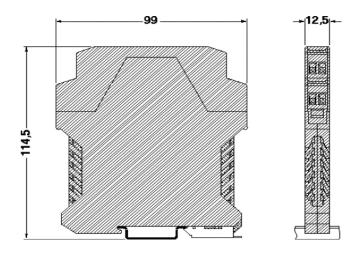

#### **Installation Data**

Mounting DIN Rail TS35

**Orientation** Any

**Connections** Screw Clamp with pressure

plate

Conductor size 0.5-4.0mm lnsulation Stripping 12mm Approx 95g

#### Connection Details (Low Voltage Supply Version)

- Power Input -ve
- 2. Power Input +ve
- 4. Process Input -ve
- 5. Process Input +ve
- 6. T/C Shield
- 10. Output -ve
- Output +ve

Email: sales@coulton.com

#### **Ordering Information**

Please supply:

Part Number: TC-TC

 Input Type:
 e.g Type K T/C

 Input Range:
 e.g 0-500≡C

 Power Supply:
 -6 (DC) or -3 (AC)

**Isolation:** Full 3-Port **Output Linearisation:** Yes / No