

FKC - Differential Pressure (flow) Transmitter for High Static Pressure



Solutions for specific customer applications :

Based on extensive experience of supplying transmitters for Oil & Gas applications, Fuji Electric France, is proud to announce the release of its latest Differential Pressure as a direct response to our customer's requirement in high pressure applications that are traditionally found in Oil & Gas flow measurement.

The experience and technical capability that we built into the new transmitter enables it to measure differential pressures of 130mbar at static pressures of up to 15 000 Psi (1035 bar), typically found in top side and subsea applications.

Measuring principle :

The transmitter utilizes a unique micromachined capacitive silicon sensor with state of the art microprocessor technology to provide exceptional performance and functionality. The silicon sensor is assembled floating in measuring cell neck, which allows extreme high line pressures and improves the static pressure characteristics.

Robust construction :

The design is based on an all welded construction, where the welded assembling of the process covers on the measuring cell replaces the gaskets. Adapted SS 660 bolting and the specific process covers – NACE compatible – ensure that the required mechanical strength to the assembly is certified according to a PED category IV module H1.

Performance Specifications

Accuracy rating : (including linearity, hysteresis, and repeatability)	For spans greater than 1/10 of URL : $\pm 0.1\%$ of span
Stability	$\pm 0.1\%$ of upper range limit (URL) for 3 years
Ambient temperature effect	Zero : $\pm (0.1 + 0.025 \times \text{URL} / \text{span})$ in % of URL / 28°C Total : $\pm (0.125 + 0.025 \times \text{URL} / \text{span})$ in % of URL / 28°C Double the effects for diaphragm material code "H" (7th digit in codes symbols)
Static pressure effect	Zero : $\pm 0.1\%$ of URL / 10 MPa Span : 0 to -0.6 % of span / 10 MPa Double the effects for diaphragm material code "H" (7th digit in codes symbols)
Supply voltage effect	Less than 0.05% of calibrated span per 10V
RFI effect	Less than 0.2% of URL for the frequencies of 20 to 1000MHz and field strength 30 V/m when electronics covers in place. (Classification : 2-abc : 0.2% span per SAMA PMC 33.1)
Mounting position effect	Zero shift : Less than 0.12kPa {1.2m bar} for a 10° tilt in any plane. No effect on span. This error can be corrected by adjusting Zero after installation.
Vibration effect	$< \pm 0,25\%$ of spans for spans greater than 1/10 of URL. Frequency 10 to 150Hz, acceleration 39,2m/sec ²
Dielectric strength	500V AC, 50/60Hz 1 min, between circuit and earth.
Insulation resistance	More than 100MΩ at 500V DC
Turn-on time	4 seconds

Specifications in case of square root output

Accuracy rating	Output 50 to 100% : $\pm 0,1\%$ of span 20 to 50% : $\pm 0,25\%$ of span 10 to 20% : $\pm 0,5\%$ of span
Ambient temperature effect	Shift at 20% output point : $\pm (0,3 + 0,25 \times \text{URL} / \text{span})$ in % of URL / 28°C
Low flow cut-off	Customer configurable for any point between 0 to 20% of output.



Physical Specifications

Process connections	1/4" NPT, autoclave 9/16 - 18 UNF - 2B, others upon request.
Wetted parts materials	Diaphragm SS 316L, Hast.C 276, Others : SS 316L, Hast.C 276, Duplex, Inconel 625
Non wetted parts	Electronics housing : - Low copper die-cast aluminum alloy (standard), finished with epoxy / polyurethane double coating - SS 316 Bolts / nuts : SS 660
Ambient temperature	0 to 85°C
Process temperature	0 to 120 °C
Remote seal designs	To avoid hydrate formation for subsea applications, remote seals can be assembled on the DP transmitter. Possible process connections via remote seals according API, RTJ standards or according customer design.

Code Symbols


1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	DESCRIPTION														
F	K	C					4	-		C			-	W	W	Smart, 4-20 mAdc + Fuji/Hart™ digital signal													
																<table border="1"> <tr> <td>Process connection</td> <td>Electrical connection</td> </tr> <tr> <td>1/4"-18 NPT</td> <td>1/2"-14 NPT</td> </tr> <tr> <td>1/4"-18 NPT</td> <td>M 20 x 1,5</td> </tr> <tr> <td>Autoclave 9/16-18 UNF-2B</td> <td>M 20 x 1,5 or 1/2"-14 NPT</td> </tr> </table>	Process connection	Electrical connection	1/4"-18 NPT	1/2"-14 NPT	1/4"-18 NPT	M 20 x 1,5	Autoclave 9/16-18 UNF-2B	M 20 x 1,5 or 1/2"-14 NPT					
Process connection	Electrical connection																												
1/4"-18 NPT	1/2"-14 NPT																												
1/4"-18 NPT	M 20 x 1,5																												
Autoclave 9/16-18 UNF-2B	M 20 x 1,5 or 1/2"-14 NPT																												
																<table border="1"> <tr> <td>Max working pressure (static pressure)</td> <td>Test pressure</td> </tr> <tr> <td>690 bar - M20 bolting</td> <td>1035 bar (15000 Psi)</td> </tr> <tr> <td>860 bar - M20 bolting</td> <td>1290 bar (18710 Psi)</td> </tr> <tr> <td>1035 bar - M20 bolting</td> <td>1553 bar (22500 Psi)</td> </tr> </table>	Max working pressure (static pressure)	Test pressure	690 bar - M20 bolting	1035 bar (15000 Psi)	860 bar - M20 bolting	1290 bar (18710 Psi)	1035 bar - M20 bolting	1553 bar (22500 Psi)					
Max working pressure (static pressure)	Test pressure																												
690 bar - M20 bolting	1035 bar (15000 Psi)																												
860 bar - M20 bolting	1290 bar (18710 Psi)																												
1035 bar - M20 bolting	1553 bar (22500 Psi)																												
																<table border="1"> <tr> <td>Range</td> </tr> <tr> <td>Min/max range 0 - 130 / 0 - 320 mbar</td> </tr> <tr> <td>Min/max range 0 - 130 / 0 - 1300 mbar</td> </tr> <tr> <td>Min/max range 0 - 500 / 0 - 5000 mbar</td> </tr> <tr> <td>Min/max range 0 - 3000 / 0 - 30000 mbar</td> </tr> </table>	Range	Min/max range 0 - 130 / 0 - 320 mbar	Min/max range 0 - 130 / 0 - 1300 mbar	Min/max range 0 - 500 / 0 - 5000 mbar	Min/max range 0 - 3000 / 0 - 30000 mbar								
Range																													
Min/max range 0 - 130 / 0 - 320 mbar																													
Min/max range 0 - 130 / 0 - 1300 mbar																													
Min/max range 0 - 500 / 0 - 5000 mbar																													
Min/max range 0 - 3000 / 0 - 30000 mbar																													
																<table border="1"> <tr> <td>Wetted parts material</td> </tr> <tr> <td>All wetted parts SS 316(L)</td> </tr> <tr> <td>Measuring cell wetted parts in Hast.C 276 - process cover in SS 316L</td> </tr> </table>	Wetted parts material	All wetted parts SS 316(L)	Measuring cell wetted parts in Hast.C 276 - process cover in SS 316L										
Wetted parts material																													
All wetted parts SS 316(L)																													
Measuring cell wetted parts in Hast.C 276 - process cover in SS 316L																													
																<table border="1"> <tr> <td>Indicator</td> </tr> <tr> <td>No indicator</td> </tr> <tr> <td>Digital indicator, 0-100%</td> </tr> <tr> <td>Digital indicator, Custom scale</td> </tr> </table>	Indicator	No indicator	Digital indicator, 0-100%	Digital indicator, Custom scale									
Indicator																													
No indicator																													
Digital indicator, 0-100%																													
Digital indicator, Custom scale																													
																<table border="1"> <tr> <td>Approvals for hazardous locations (consult FUJI for availability)</td> </tr> <tr> <td>None (standard)</td> </tr> <tr> <td>Flameproof housing ATEX $\text{Ex II 2 GD - EEx d IIC T5/T6}$</td> </tr> <tr> <td>Intrinsic Safety ATEX $\text{Ex II 1 GD - EEx ia IIC T4/T5}$</td> </tr> <tr> <td>FM - Flameproof housing Class I, Division 1, Group B,C,D</td> </tr> <tr> <td>Dust ignitionproof Class II/III, Division 1, Group E,F,G - (elec. conn. code "T" only)</td> </tr> <tr> <td>CSA - Flameproof housing Class I, Group C,D - Class II, Group E,F,G</td> </tr> <tr> <td>Class III - (electrical connection code "T" only)</td> </tr> <tr> <td>FM - Intrinsic safety Class I, II, III, Division 1, Group A,B,C,D,E,F,G</td> </tr> <tr> <td>Nonincentive Class I,II,III, Division 2, Group A,B,C,D,F,G</td> </tr> <tr> <td>CSA - Intrinsic safety & Nonincentive Class I, Group A,B,C,D - Class II, Group E,F,G</td> </tr> <tr> <td>Class III - Temp code T4 for all classes (electrical connection code "T" only)</td> </tr> <tr> <td>Combined ATEX $\text{Ex II 2 GD - EEx d IIC T5/T6}$ & ATEX $\text{Ex II 1 GD - EEx ia IIC T4/T5}$</td> </tr> </table>	Approvals for hazardous locations (consult FUJI for availability)	None (standard)	Flameproof housing ATEX $\text{Ex II 2 GD - EEx d IIC T5/T6}$	Intrinsic Safety ATEX $\text{Ex II 1 GD - EEx ia IIC T4/T5}$	FM - Flameproof housing Class I, Division 1, Group B,C,D	Dust ignitionproof Class II/III, Division 1, Group E,F,G - (elec. conn. code "T" only)	CSA - Flameproof housing Class I, Group C,D - Class II, Group E,F,G	Class III - (electrical connection code "T" only)	FM - Intrinsic safety Class I, II, III, Division 1, Group A,B,C,D,E,F,G	Nonincentive Class I,II,III, Division 2, Group A,B,C,D,F,G	CSA - Intrinsic safety & Nonincentive Class I, Group A,B,C,D - Class II, Group E,F,G	Class III - Temp code T4 for all classes (electrical connection code "T" only)	Combined ATEX $\text{Ex II 2 GD - EEx d IIC T5/T6}$ & ATEX $\text{Ex II 1 GD - EEx ia IIC T4/T5}$
Approvals for hazardous locations (consult FUJI for availability)																													
None (standard)																													
Flameproof housing ATEX $\text{Ex II 2 GD - EEx d IIC T5/T6}$																													
Intrinsic Safety ATEX $\text{Ex II 1 GD - EEx ia IIC T4/T5}$																													
FM - Flameproof housing Class I, Division 1, Group B,C,D																													
Dust ignitionproof Class II/III, Division 1, Group E,F,G - (elec. conn. code "T" only)																													
CSA - Flameproof housing Class I, Group C,D - Class II, Group E,F,G																													
Class III - (electrical connection code "T" only)																													
FM - Intrinsic safety Class I, II, III, Division 1, Group A,B,C,D,E,F,G																													
Nonincentive Class I,II,III, Division 2, Group A,B,C,D,F,G																													
CSA - Intrinsic safety & Nonincentive Class I, Group A,B,C,D - Class II, Group E,F,G																													
Class III - Temp code T4 for all classes (electrical connection code "T" only)																													
Combined ATEX $\text{Ex II 2 GD - EEx d IIC T5/T6}$ & ATEX $\text{Ex II 1 GD - EEx ia IIC T4/T5}$																													
																<table border="1"> <tr> <td>Mounting bracket</td> </tr> <tr> <td></td> </tr> </table>	Mounting bracket												
Mounting bracket																													
																<table border="1"> <tr> <td>Tag plate</td> <td>Electronics housing</td> </tr> <tr> <td>Without</td> <td>Aluminium</td> </tr> <tr> <td>SS 316L</td> <td>Aluminium</td> </tr> <tr> <td>Without</td> <td>SS 316</td> </tr> <tr> <td>SS 316L</td> <td>SS 316</td> </tr> </table>	Tag plate	Electronics housing	Without	Aluminium	SS 316L	Aluminium	Without	SS 316	SS 316L	SS 316			
Tag plate	Electronics housing																												
Without	Aluminium																												
SS 316L	Aluminium																												
Without	SS 316																												
SS 316L	SS 316																												
																<table border="1"> <tr> <td>Fill fluid</td> </tr> <tr> <td>Specific oil fill for cell</td> </tr> <tr> <td>Specific oil fill for cell. Wetted parts and bolting in conformity with NACE</td> </tr> </table>	Fill fluid	Specific oil fill for cell	Specific oil fill for cell. Wetted parts and bolting in conformity with NACE										
Fill fluid																													
Specific oil fill for cell																													
Specific oil fill for cell. Wetted parts and bolting in conformity with NACE																													
																<table border="1"> <tr> <td>-</td> <td>W</td> </tr> <tr> <td></td> <td>Welded process cover design</td> </tr> </table>	-	W		Welded process cover design									
-	W																												
	Welded process cover design																												
																<table border="1"> <tr> <td>W</td> </tr> <tr> <td>Process cover bolts/nuts in ASTM A 453 grade 660</td> </tr> </table>	W	Process cover bolts/nuts in ASTM A 453 grade 660											
W																													
Process cover bolts/nuts in ASTM A 453 grade 660																													

Outline dimensions

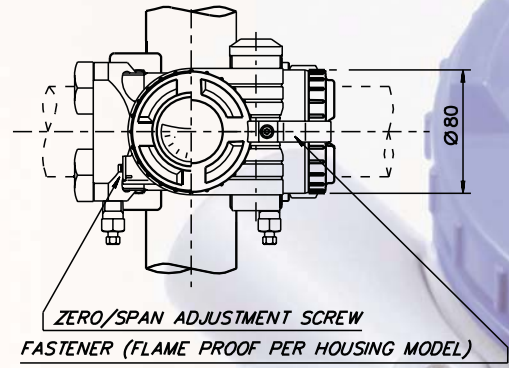
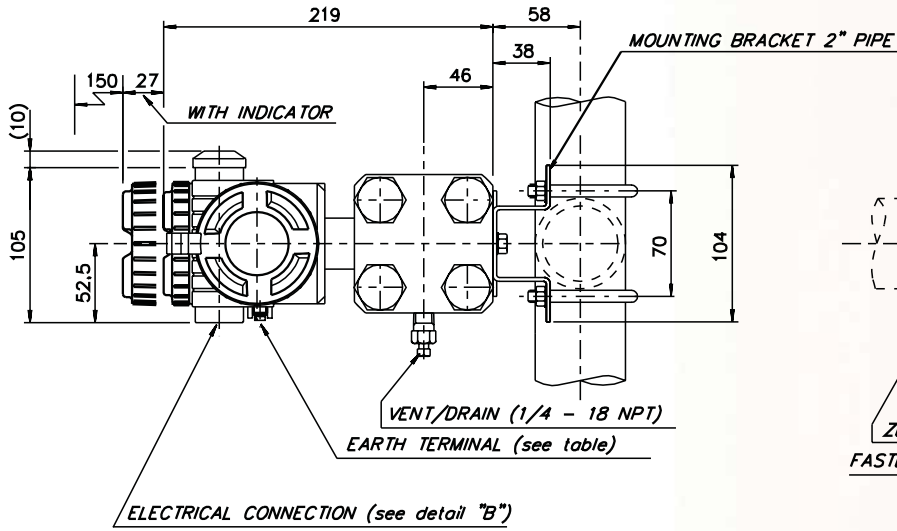


PROCESS CONNECTIONS : 1/4 - 18 NPT (STANDARD)

- OR (OPTIONAL)
- 13/16-16 UN - FOR 9/16 MP AUTOCLAVE CONNECTIONS
- 9/16-18 UNF - FOR 1/4 HP AUTOCLAVE CONNECTIONS
- 9/16-18 UNF - FOR 3/8 MP AUTOCLAVE CONNECTIONS
- 1/2 - 14 NPT
- M16 x 1

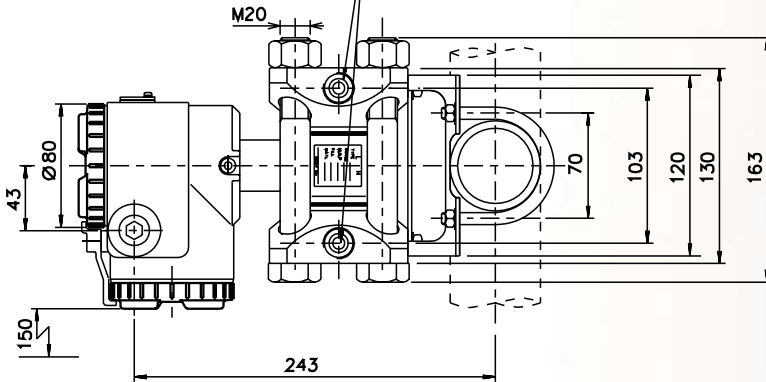

CONNECTION DIAGRAM



SEE TABLE

CONDUIT CONN.	EARTH TERMINAL	
	D	F
1/2-14NPT	16	5
Pg 13.5	8	4.5
M20x1.5	16	5

Fuji Electric

Your distributor:

Coulton Instrumentation Ltd

17 Somerford Business Park, Christchurch, BH23 3RU, UK

Tel: +44 1202 480 303

E-mail: sales@coulton.com Web: www.coulton.com

Fuji Electric can accept no responsibility for possible errors in catalogues, brochures or other printed material. Fuji Electric reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequential changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. All rights reserved.