

Industrial Interface The Signal Conditioning People

PSU-24

24VA ISOLATED MAINS POWER SUPPLY UNIT

- 90 to 260 Vac Operation
- 24W Output
- Short Circuit Protected
- Safety to EN 61010-1
- Range of Output Voltages Available



Description

The PSU range is a family of mains input, DC output DIN rail mounted power supplies. 115 and 230 Vac input options are available with an output voltage of 24Vdc as standard.

All outputs are protected by current limiting, ensuring short circuit proof operation.

Typical applications for the PSU include powering multiple transmitters, other control and instrumentation devices and as an auxiliary supply for small control panels.

The PSU-24 power supply is housed in a compact DIN rail mounting enclosure only 33mm wide, and complies with VDE 0871 Curve B for conducted EMI.

Inputs

Recommended Operating Conditions

Input Voltage Range Output Voltage Range 90 to 260 Vac 24 Vdc others available

Output Power

24\\\

Environmental Conditions

Storage Temperature Operating Ambient Relative Humidity -40 to 70 ≡C 0 to 40 ≡C 0 to 90 % RH

Fax: 01202 480 808


Tel: 01202 480 303 Email: sales@coulton.com



Industrial Interface The Signal Conditioning People

Performance Characteristics

Parameter	Min	Тур	Max	Comments	
Supply Voltage	85Vrms		270Vrms	50/60 Hz	
Supply Current			250mA rms	At 240Vac supply	
Output Voltage		24V		Other options available	
Output Current			1A		
Operating Ambient	0≡C		40≡C		
Relative Humidity	0%		90%		
Surge Voltage		2.5kV for 50μS		Transient of 10kV/µS	
Notes	Absolute maximum ratings indicate sustained limits beyond which damage to the device				
	may occur.				
	Device is protected against reverse polarity connection.				
	Device is protected against output short circuit				
	IMPORTANT: An anti-surge fuse of 1A (T1A) with a voltage rating of 250V and a				
	breaking capacity of 35A at 250Vac is fitted. Replace only with the same type and				
	i rating	rating			

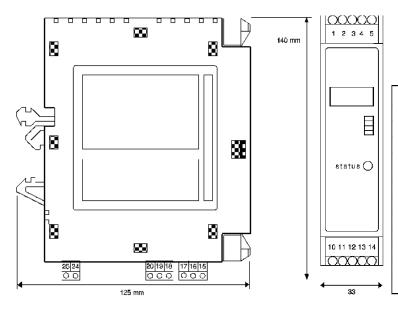

Installation Data

DIN Rail TS32/35 Mounting

Orientation Any

Connections Screw Clamp with pressure

plate

Conductor size 0.5-4.0mm **Insulation Stripping** 12mm Weight

Approx 260g

Fax: 01202 480 808

Connection Details

10. Power Supply Live

12. **Power Supply Neutral**

Power Supply Earth 14.

Output -ve 1.

Output +ve 5.

Ordering Information

Please supply:

Part Number: PSU-24

Output Voltage: e.g. 24Vdc

www.coulton.com